

Textil
textile upholstery fabric



Breite/Höhe
width/height

ca. 150 cm


Gewicht
weight

420 g/m²

Material
material

70% WO REC, 30% PES FR

Pflegeanleitung
care instructions

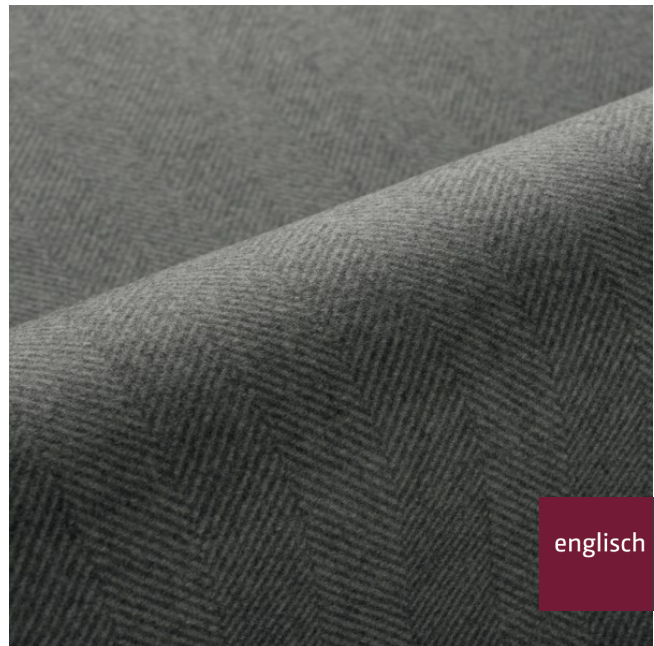

englisch dekor
vienna

Resteinsprung
shrinkage

2-3 %

Rapportbreite
repeat width

ca. 6 cm

Schwer brennbar
flame retardant

Ja/yes

EN 1021 1+2
BS5852 - SOURCES 0+1
EN 13773
ÖNORM B3825
ÖNORM A3800
CLASSE UNO
IMO - FTP PART 7
IMO - FTP PART 8

Lichtechtheit
fastness to light

4-5

EN ISO 105-B02

Reibechtheit (trocken)
fastness to rubbing (dry)

4-5

EN ISO 105-X12

Reibechtheit (nass)
fastness to rubbing (wet)

4

EN ISO 105-X12

Pilling
pilling

4-5

EN ISO 12945-2

Scheuertouren Martindale
abrasion resistance Martindale

65000

EN ISO 12947

Schallabsorberklasse
sound absorption class

A

EN ISO 11654

Schallabsorptionsgrad
noise reduction coefficient : NRC

0,90

ASTM C423

Abdunkelung
darkening

95 %

EN 14501

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Textil

textile upholstery fabric



Zugfestigkeit Kette <i>tensile strength warp</i>	510 EN ISO 13934-1
Zugfestigkeit Schuss <i>tensile strength weft</i>	300 EN ISO 13934-1
Weiterreißfestigkeit Kette <i>tear strength warp</i>	43 EN ISO 13937-3
Weiterreißfestigkeit Schuss <i>tear strength weft</i>	29 EN ISO 13937-3
Recycelt <i>recycled</i>	Ja/yes
Thermo <i>thermo</i>	Ja/yes