

Textil

textile upholstery fabric




Breite/Höhe **ca. 140 cm**
width/height

Gewicht **400 g/m²**
weight

Material **50% PES FR, 37% MAC, 13% CO**
material

Pflegeanleitung **feucht abwischen /**
care instructions **clean with a damp cloth**

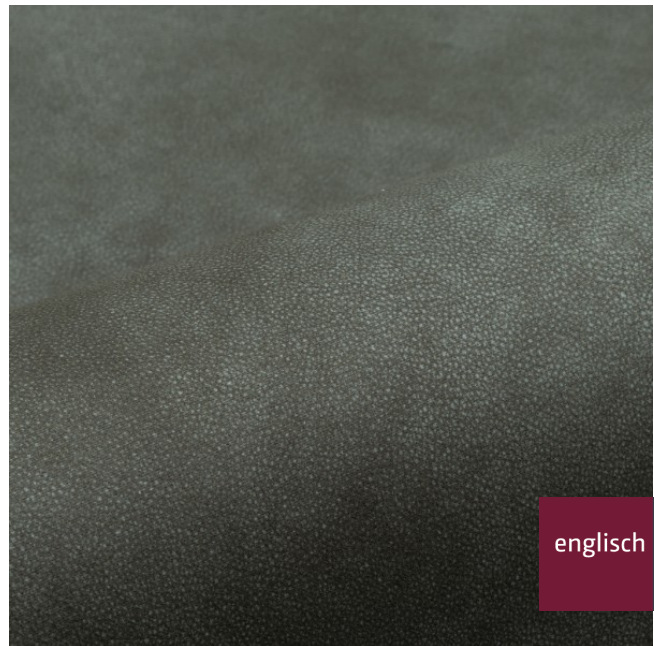

englisch dekor
vienna

A1804/140

Schwer brennbar **Ja/yes**
flame retardant
EN 1021 1+2
ÖNORM B3825
ÖNORM A3800
CLASSE UNO
IMO - FTP PART 8

Fleckschutz **Ja/yes**
stain repellent

Easy Clean **Ja/yes**
easy clean

Lichtechtheit **4-5**
fastness to light
EN ISO 105-B02

Reibechtheit (trocken) **4-5**
fastness to rubbing (dry)
EN ISO 105-X12

Reibechtheit (nass) **3-4**
fastness to rubbing (wet)
EN ISO 105-X12


Pilling **4-5**
pilling
EN ISO 12945-2

Scheuertouren Martindale **50000**
abrasion resistance Martindale
EN ISO 12947

Garntyp **einfach**
yarn type *single*

Bindung **Leinwand**
weave *plain*

Färbemethode **STÜCKFÄRBER**
dyeing method

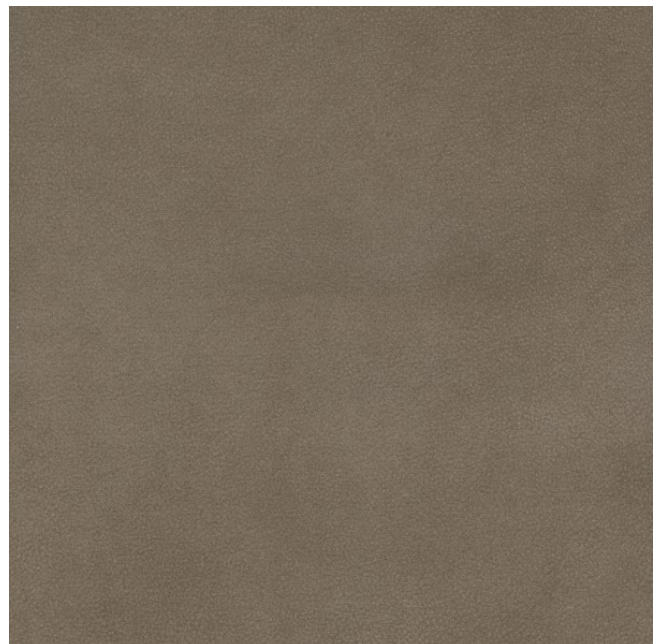

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Textil

textile upholstery fabric



| | |
|--|------------------------------|
| Zugfestigkeit Kette <i>tensile strength warp</i> | 800 EN ISO 13934-1 |
| Zugfestigkeit Schuss <i>tensile strength weft</i> | 800 EN ISO 13934-1 |
| Weiterreißfestigkeit Kette <i>tear strength warp</i> | 40 EN ISO 13937-3 |
| Weiterreißfestigkeit Schuss <i>tear strength weft</i> | 40 EN ISO 13937-3 |
| Nahtschiebewiderstand <i>resistance to seam slippage</i> | 4 EN ISO 13936-2 |