

Möbelstoff/Upholstery FR "feel"


A2219-A2242/140

Textil

textile upholstery fabric




Breite/Höhe <i>width/height</i>	ca. 140 cm
Gewicht <i>weight</i>	510 g/m²
Material <i>material</i>	100% PES FR
Pflegeanleitung <i>care instructions</i>	feucht abwischen / clean with a damp cloth

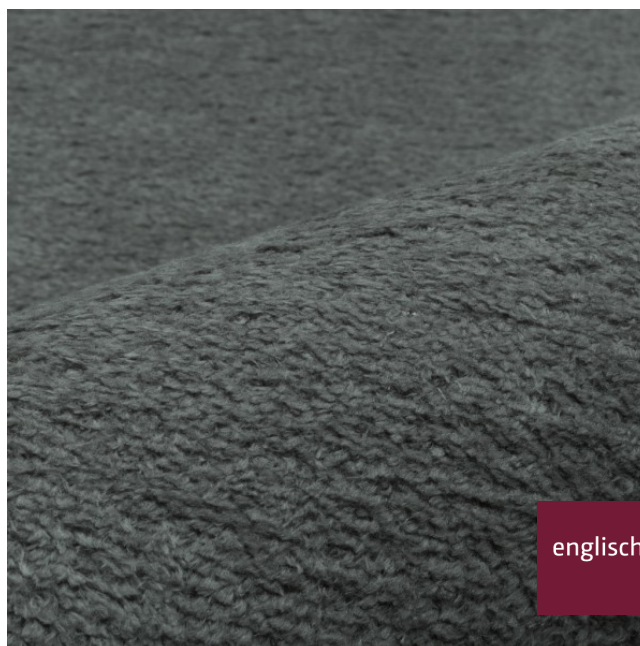

englisch dekor
vienna

A2239/140

Schwer brennbar <i>flame retardant</i>	Ja/yes EN 1021 1+2 BS5852 - SOURCES 0+1 ÖNORM B3825 ÖNORM A3800 CLASSE UNO
Fleckschutz <i>stain repellent</i>	Ja/yes
Lichtechtheit <i>fastness to light</i>	4-5 EN ISO 105-B02
Reibechtheit (trocken) <i>fastness to rubbing (dry)</i>	4 EN ISO 105-X12
Reibechtheit (nass) <i>fastness to rubbing (wet)</i>	4 EN ISO 105-X12
Pilling <i>pilling</i>	4 EN ISO 12945-2
Scheuertouren Martindale <i>abrasion resistance Martindale</i>	45000 EN ISO 12947
Garntyp <i>yarn type</i>	core core
Bindung <i>weave</i>	Leinwand plain
Färbemethode <i>dyeing method</i>	Stückfärber piece dyed
Zugfestigkeit Kette <i>tensile strength warp</i>	1830 EN ISO 13934-1

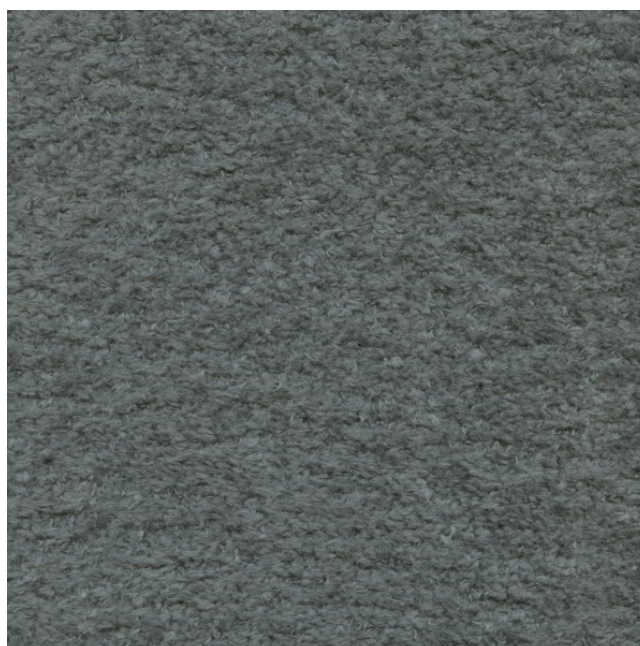

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Möbelstoff/Upholstery FR "feel"

A2219-A2242/140

Textil

textile upholstery fabric



Zugfestigkeit Schuss <i>tensile strength weft</i>	1027 EN ISO 13934-1
Weiterreißfestigkeit Kette <i>tear strength warp</i>	104,75 EN ISO 13937-3
Weiterreißfestigkeit Schuss <i>tear strength weft</i>	83,75 EN ISO 13937-3
Nahtschiebewiderstand <i>resistance to seam slippage</i>	3 EN ISO 13936-2