

Textil
textile upholstery fabric




Breite/Höhe **ca. 137 cm**
width/height

Gewicht **500 g/m²**
weight

Material **75% WO REC, 25% PA**
material

Pflegeanleitung
care instructions

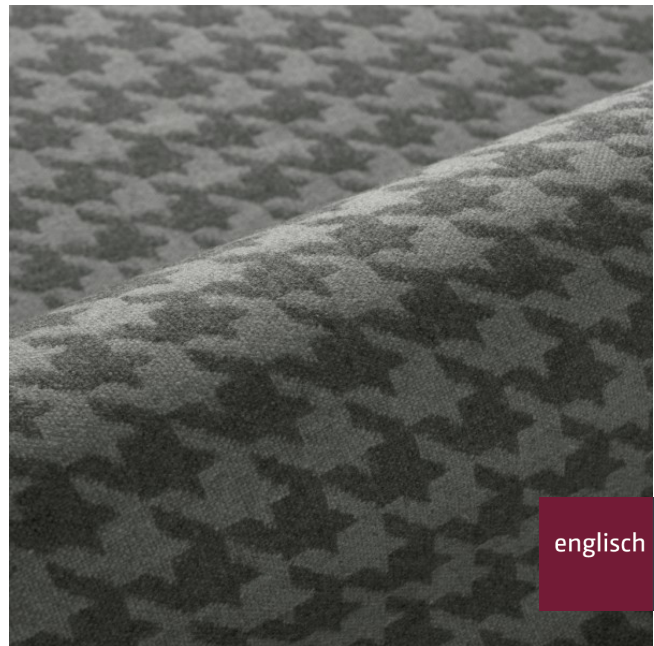

englisch dekor
vienna

A2278/137

Resteinsprung **2-3 %**
shrinkage

Rapporthöhe **ca. 3 cm**
repeat height

Rapportbreite **ca. 3 cm**
repeat width

Schwer brennbar **Ja/yes**
flame retardant

EN 1021 1+2
BS5852 - SOURCES 0+1
EN 13773
ÖNORM B3825
ÖNORM A3800
CLASSE UNO
IMO - FTP PART 7
IMO - FTP PART 8

Lichtechtheit **4-5**
fastness to light

EN ISO 105-B02

Reibechtheit (trocken) **4-5**
fastness to rubbing (dry)

EN ISO 105-X12

Reibechtheit (nass) **4**
fastness to rubbing (wet)

EN ISO 105-X12

Pilling **4-5**
pilling


EN ISO 12945-2

Scheuertouren Martindale **65000**
abrasion resistance Martindale

EN ISO 12947

Schallabsorberklasse **A**
sound absorption class

EN ISO 11654

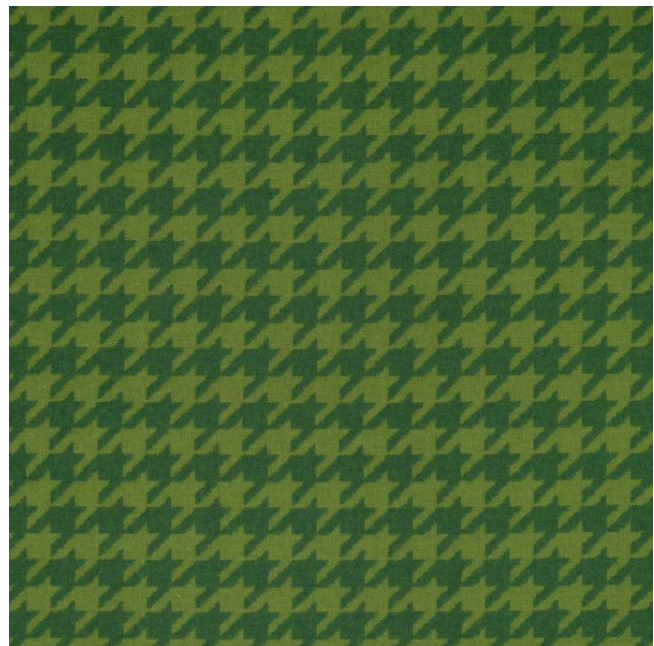

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Textil

textile upholstery fabric



Schallabsorptionsgrad <i>noise reduction coefficient : NRC</i>	0,90 ASTM C423
Abdunkelung <i>darkening</i>	95 % EN 14501
Zugfestigkeit Kette <i>tensile strength warp</i>	511 EN ISO 13934-1
Zugfestigkeit Schuss <i>tensile strength weft</i>	301 EN ISO 13934-1
Weiterreißfestigkeit Kette <i>tear strength warp</i>	43 EN ISO 13937-3
Weiterreißfestigkeit Schuss <i>tear strength weft</i>	28,9 EN ISO 13937-3
Recycelt <i>recycled</i>	Ja/yes
Thermo <i>thermo</i>	Ja/yes