

Textil
textile upholstery fabric

Dekor
curtain



Breite/Höhe
width/height

ca. 150 cm


Gewicht
weight

400 g/m²

Material
material

70% WV, 25% PA, 5% AF

Pflegeanleitung
care instructions

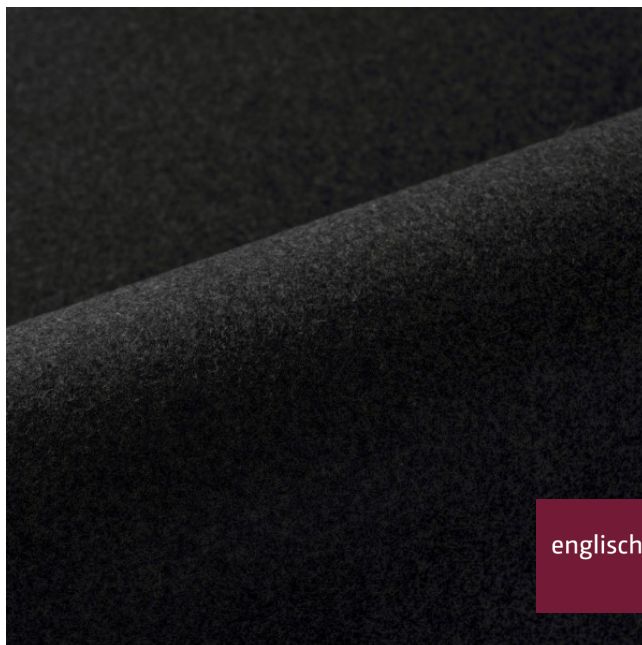

A2497/150

Resteinsprung
shrinkage

2-3 %

Schwer brennbar
flame retardant

Ja/yes

EN 1021 1+2
BS5852 - SOURCES 0+1
EN 13773
ÖNORM B3825
ÖNORM A3800
IMO - FTP PART 7
IMO - FTP PART 8
IMO-FTP CODE 8

Lichtechtheit
fastness to light

4-5

EN ISO 105-B02

Reibechtheit (trocken)
fastness to rubbing (dry)

4-5

EN ISO 105-X12

Reibechtheit (nass)
fastness to rubbing (wet)

4

EN ISO 105-X12

Pilling
pilling

4-5

EN ISO 12945-2

Scheuertouren Martindale
abrasion resistance Martindale

65000

EN ISO 12947

Schallabsorberklasse
sound absorption class

A

EN ISO 11654

Schallabsorptionsgrad
noise reduction coefficient : NRC


0,90

ASTM C423

Abdunkelung
darkening

95 %

EN 14501

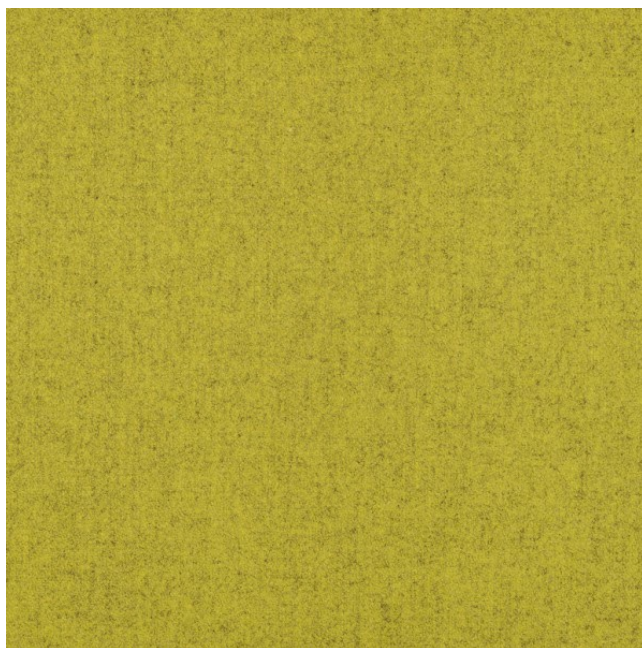

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Textil

textile upholstery fabric

Dekor

curtain



Zugfestigkeit Kette **511**
tensile strength warp EN ISO 13934-1

Zugfestigkeit Schuss **301**
tensile strength weft EN ISO 13934-1

Weiterreißfestigkeit Kette **43**
tear strength warp EN ISO 13937-3

Weiterreißfestigkeit Schuss **28,9**
tear strength weft EN ISO 13937-3

Recycelt **Ja/yes**
recycled

Thermo **Ja/yes**
thermo