

Textil

textile upholstery fabric



Breite/Höhe ca. 140 cm
width/height

Gewicht 669 g/m²
weight

Material 70% WV, 25% PA, 5% AF
material

Pflegeanleitung
care instructions



englisch dekora
vienna

A2941/140

Resteinsprung 3-4 %
shrinkage

Rapporthöhe ca. 51 cm
repeat height

Rapportbreite ca. 20 cm
repeat width

Schwer brennbar Ja/yes
flame retardant

BS5852 - SOURCES 0+1
EN 1021 1+2
ÖNORM B3825
ÖNORM A3800
CLASSE UNO
IMO - FTP PART 8

Lichtechtheit 4-5
fastness to light

EN ISO 105-B02

Reibechtheit (trocken) 4-5
fastness to rubbing (dry)

EN ISO 105-X12

Reibechtheit (nass) 4
fastness to rubbing (wet)

EN ISO 105-X12

Pilling 4
pilling

EN ISO 12945-2

Scheuertouren Martindale 65000
abrasion resistance Martindale


EN ISO 12947

Schallabsorberklasse A
sound absorption class

EN ISO 11654

Schallabsorptionsgrad 0,90
noise reduction coefficient : NRC

ASTM C423

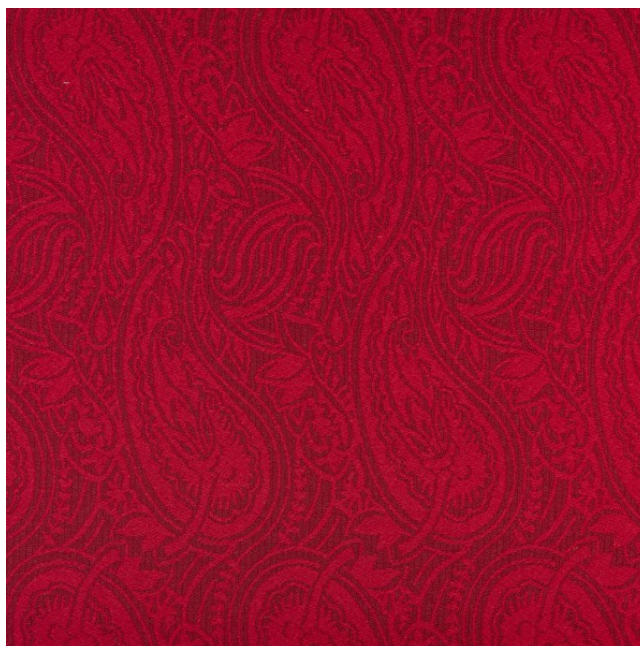

Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Textil

textile upholstery fabric



| | |
|---|---------------------------------|
| Zugfestigkeit Kette <i>tensile strength warp</i> | 511 N EN ISO 13934-1 |
| Zugfestigkeit Schuss <i>tensile strength weft</i> | 301 N EN ISO 13934-1 |
| Weiterreißfestigkeit Kette <i>tear strength warp</i> | 43 N EN ISO 13937-3 |
| Weiterreißfestigkeit Schuss <i>tear strength weft</i> | 28.9 N EN ISO 13937-3 |
| Recycelt <i>recycled</i> | Ja/yes |
| Thermo <i>thermo</i> | Ja/yes |