

Dekor
curtain



Breite/Höhe
width/height

ca. 140 cm


Gewicht
weight

420 g/m²

Material
material

70% WO REC, 25% PA, 5% AF

Pflegeanleitung
care instructions

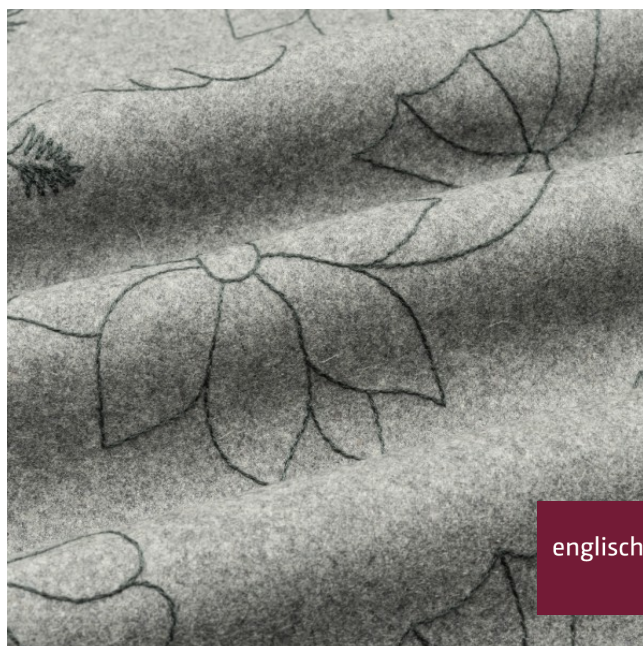

englisch dekor
vienna

E3508/140

Resteinsprung
shrinkage

2-3 %

Rapporthöhe
repeat height

ca. 32 cm

Schwer brennbar
flame retardant

Ja/yes
EN 13773
ÖNORM A3800
CLASSE UNO
IMO - FTP PART 7

Lichtechtheit
fastness to light

4-5
EN ISO 105-B02

Reibechtheit (trocken)
fastness to rubbing (dry)

4-5
EN ISO 105-X12

Reibechtheit (nass)
fastness to rubbing (wet)

4
EN ISO 105-X12

Pilling
pilling

4-5
EN ISO 12945-2

Schallabsorberklasse
sound absorption class

A
EN ISO 11654

Schallabsorptionsgrad
noise reduction coefficient : NRC

0,90
ASTM C423

Abdunkelung
darkening

95 %
EN 14501

Zugfestigkeit Kette
tensile strength warp

511
EN ISO 13934-1



Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Dekor
curtain



Zugfestigkeit Schuss **301**
tensile strength weft EN ISO 13934-1

Weiterreißfestigkeit Kette **43**
tear strength warp EN ISO 13937-3

Weiterreißfestigkeit Schuss **28,9**
tear strength weft EN ISO 13937-3

Nahtschiebewiderstand **3,5/2,8**
resistance to seam slippage EN ISO 13936-2

Recycelt **Ja/yes**
recycled

Thermo **Ja/yes**
thermo