

Dimout FR

V7565/150-V7586/150

V7565-V7587/150

V2617-V2667/150

V2617/150-V2667/150

Dimout

dimout



Breite/Höhe

width/height

ca. 150 cm

Gewicht

weight

285 g/m²


Material

material

100% PES FR

Pflegeanleitung

care instructions

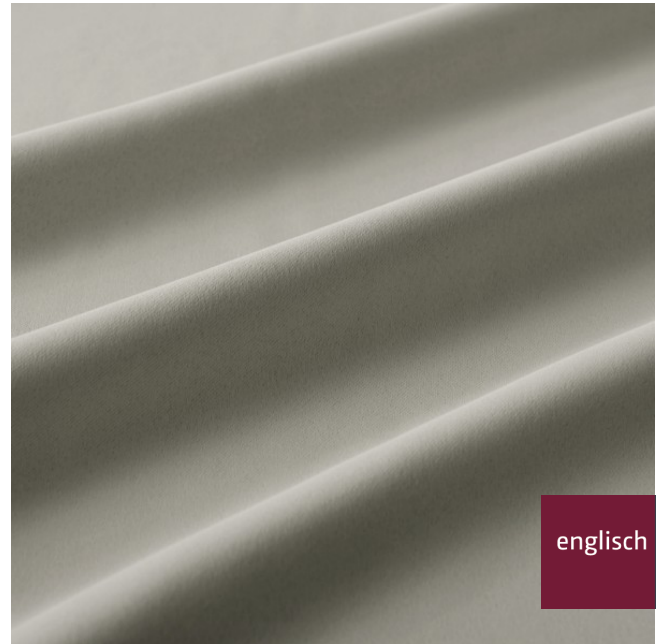

englisch dekoralien
vienna

Schwer brennbar

flame retardant

Ja/yes

BS5867 - TYPE B

BS5867 - TYPE C

EN 13773

ÖNORM A3800

DIN 4102 - B1

CLASSE UNO

IMO - FTP PART 7

Lichtechtheit

fastness to light

4-5

EN ISO 105-B02

Reibechtheit (trocken)

fastness to rubbing (dry)

4-5

EN ISO 105-X12

Reibechtheit (nass)

fastness to rubbing (wet)

4-5

EN ISO 105-X12

Schallabsorberklasse

sound absorption class

C

EN ISO 11654

Schallabsorptionsgrad

noise reduction coefficient : NRC

0,75

ASTM C423

Abdunkelung

darkening

99 %

EN 14501

Garntyp

yarn type

einfach

single

Bindung

weave

Leinwand

plain

V7582 /150



Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Dimout FR

Dimout
dimout

V7565/150-V7586/150

V7565-V7587/150

V2617-V2667/150

V2617/150-V2667/150



Färbemethode

dying method

Stückfärber

piece dyed

Öko-tex Standard 100

öko-tex Standard 100

Ja/yes

Achtung: das menschliche Auge empfindet hellere Farben als lichtdurchlässiger.

Attention: the human eye perceives lighter colours as more permeable to light.