

# Dimout FR

V7565/150-V7586/150

V7565-V7587/150

V2617-V2667/150

V2617/150-V2667/150

## Dimout

*dimout*



### Breite/Höhe

*width/height*

ca. 150 cm

### Gewicht

*weight*

285 g/m<sup>2</sup>


### Material

*material*

100% PES FR

### Pflegeanleitung

*care instructions*

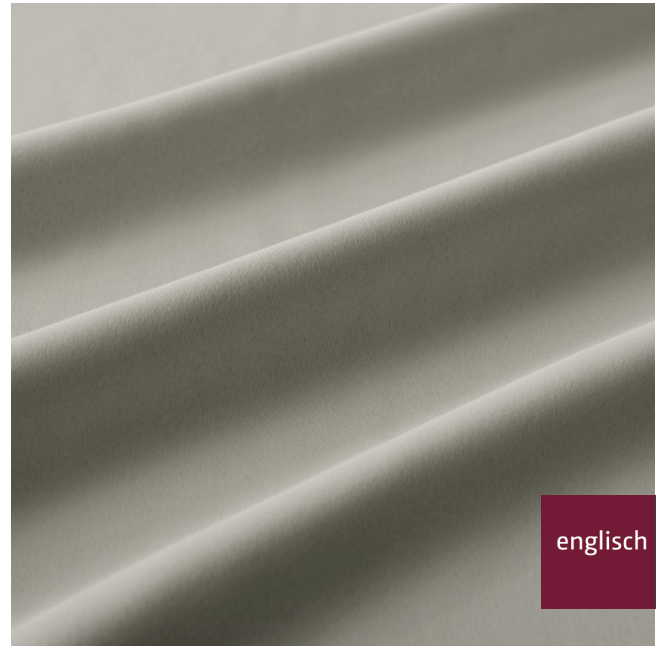

englisch dekor  
vienna

V7582 /150

### Schwer brennbar

*flame retardant*

### Ja/yes

BS5867 - TYPE B

BS5867 - TYPE C

EN 13773

ÖNORM A3800

DIN 4102 - B1

CLASSE UNO

IMO - FTP PART 7

### Lichtechtheit

*fastness to light*

4-5

EN ISO 105-B02

### Reibechtheit (trocken)

*fastness to rubbing (dry)*

4-5

EN ISO 105-X12

### Reibechtheit (nass)

*fastness to rubbing (wet)*

4-5

EN ISO 105-X12

### Schallabsorberklasse

*sound absorption class*

C

EN ISO 11654

### Schallabsorptionsgrad

*noise reduction coefficient : NRC*

0,75

ASTM C423

### Abdunkelung

*darkening*

99 %

EN 14501

### Garntyp

*yarn type*

einfach

single

### Bindung

*weave*

Leinwand

plain



Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

# Dimout FR

**Dimout**  
*dimout*

V7565/150-V7586/150

V7565-V7587/150

V2617-V2667/150

V2617/150-V2667/150



## **Färbemethode**

*dying method*

## **Stückfärber**

*piece dyed*

## **Öko-tex Standard 100**

*öko-tex Standard 100*

## **Ja/yes**

Achtung: das menschliche Auge empfindet hellere Farben als lichtdurchlässiger.

*Attention: the human eye perceives lighter colours as more permeable to light.*