

Dimout FR

Dimout
dimout

V7565/150-V7586/150
V7565-V7587/150
V2617-V2667/150
V2617/150-V2667/150



Breite/Höhe
width/height

ca. 150 cm


Gewicht
weight

285 g/m²

Material
material

100% PES FR

Pflegeanleitung
care instructions

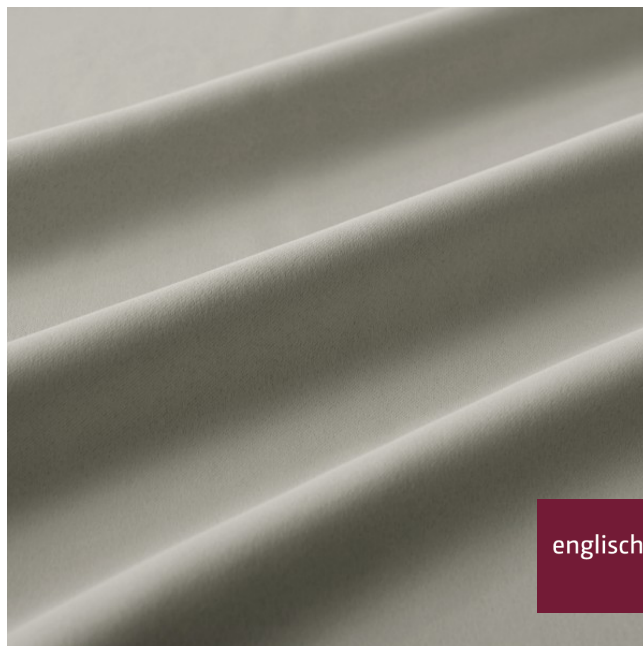

englisch dekor
vienna

Schwer brennbar
flame retardant

Ja/yes

BS5867 - TYPE B
BS5867 - TYPE C
EN 13773
ÖNORM A3800
DIN 4102 - B1
CLASSE UNO
IMO - FTP PART 7

Lichtechtheit
fastness to light

4-5

EN ISO 105-B02

Reibechtheit (trocken)
fastness to rubbing (dry)

4-5

EN ISO 105-X12

Reibechtheit (nass)
fastness to rubbing (wet)

4-5

EN ISO 105-X12

Schallabsorberklasse
sound absorption class

C

EN ISO 11654

Schallabsorptionsgrad
noise reduction coefficient : NRC

0,75

ASTM C423

Abdunkelung
darkening

99 %

EN 14501

Garntyp
yarn type

einfach
single

Bindung
weave

Leinwand
plain

V7582 /150



Vorbehaltlich Druck- und Satzfehler. Die Farben der Abbildungen können von der tatsächlichen Produktfarbe abweichen.

Typing and printing errors reserved. The color(s) of the actual product may slightly differ from those shown on this page.

Dimout FR

Dimout

dimout

V7565/150-V7586/150

V7565-V7587/150

V2617-V2667/150

V2617/150-V2667/150



Färbemethode

dying method

Stückfärber

piece dyed

Öko-tex Standard 100

öko-tex Standard 100

Ja/yes

Achtung: das menschliche Auge empfindet hellere Farben als lichtdurchlässiger.

Attention: the human eye perceives lighter colours as more permeable to light.